

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

P-6107

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/720514

INTERNATIONAL APPLICATION NO.  
PCT/FR99/01505INTERNATIONAL FILING DATE  
June 23, 1999PRIORITY DATE CLAIMED  
June 26, 1998

## TITLE OF INVENTION

METHOD AND DEVICE FOR SELECTING PARAMETERS IN A CELLULAR RADIO COMMUNICATION NETWORK

APPLICANT(S) FOR DO/EO/US

Thierry BILLON


Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☒ A copy of the International Search Report (PCT/ISA/210).
- ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
- ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 18 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
  - A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☐ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Verification of English Translation  
PCT Request Form PCT/RO/101  
4 Sheets of Formal Drawings  
Return Receipt Postcard

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) <b>09/720514</b>		INTERNATIONAL APPLICATION NO. <b>PCT/FR99/01505</b>		ATTORNEY'S DOCKET NUMBER <b>P-6107</b>	
20. The following fees are submitted:				<b>CALCULATIONS PTO USE ONLY</b>	
<b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</b> <input checked="" type="checkbox"/> Search Report has been prepared by the EPO or JPO ..... <b>\$260.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... <b>\$720.00</b> <input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... <b>\$790.00</b> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$1,070.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... <b>\$98.00</b>					
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$860.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				<b>\$0.00</b>	
<b>CLAIMS</b>	<b>NUMBER FILED</b>	<b>NUMBER EXTRA</b>	<b>RATE</b>		
Total claims	36 - 20 =	16	x \$18.00	<b>\$288.00</b>	
Independent claims	2 - 3 =	0	x \$80.00	<b>\$0.00</b>	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,148.00</b>	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$1,148.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$1,148.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$1,148.00</b>	
				Amount to be refunded	\$
				charged	\$
<input checked="" type="checkbox"/> A check in the amount of <b>\$1,148.00</b> to cover the above fees is enclosed. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. <b>18-2284</b> A duplicate copy of this sheet is enclosed.					
<b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <b>Michael L. Kenaga</b>  <b>PIPER MARBURY RUDNICK &amp; WOLFE</b>  <b>P.O. Box 64807</b>  <b>Chicago, Illinois, 60664-0807</b>   <b>(312) 368-4000</b> </div> <div style="width: 50%; text-align: right;">           SIGNATURE   <b>Michael L. Kenaga</b>          NAME   <b>34,639</b>          REGISTRATION NUMBER  <u>December 21, 2000</u>          DATE       </div> </div>					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of BILLON )  
 )  
U.S. patent application )  
(U.S. National Phase of PCT/FR99/01505 )  
filed on June 23, 1999 )  
corr. to French applic. No.98 08150 )

For : " METHOD AND DEVICE FOR SELECTING PARAMETERS IN A  
CELLULAR RADIO COMMUNICATION NETWORK "

PRELIMINARY AMENDMENT

To Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

S I R:

Prior to examination, please amend the above-  
identified application as follows:

IN THE TITLE:

Please cancel the title as translated in the front page of  
the PCT publication,n and substitute therefor: -- METHOD  
AND APPARATUS FOR SELECTING PARAMETERS IN A CELLULAR RADIO  
COMMUNICATION NETWORK --

*IN THE SPECIFICATION:*

Page 1, between lines 2 and 3, insert the heading  
-- BACKGROUND OF THE INVENTION --.

Page 3, between lines 13 and 14, insert the heading  
-- SUMMARY OF THE INVENTION --.

Page 5, delete lines 23-26.

Page 5, before line 27, insert the heading -- BRIEF  
DESCRIPTION OF THE DRAWINGS --.

Page 6, between lines 7 and 8, insert the heading  
-- DESCRIPTION OF PREFERRED EMBODIMENTS --.

*IN THE ABSTRACT:*

Please cancel the abstract as printed in the front page of  
the PCT publication, and insert the Abstract of the  
Disclosure as submitted in the appended sheet.

*IN THE CLAIMS:*

Please amend Claims 1-7 and 9-19 of the application as  
follows:

05720564-0000004

-- 1 (Amended). A method of selecting the value of at least one radio resource management parameter  $[(S_{PC}, S_{HO}, S_1, S_2, S_3, S_{TS})]$  employed by base station control units [(4)] of a cellular radio communications network, wherein, for each base station [(1)] serving mobile stations [(3)] in a cell, values are obtained of at least one quantity  $[(RXLEV, RXQUAL, DISTANCE, CIR)]$  based on measurements made on radio channels in the cell, said quantity being compared to at least one associated parameter in a procedure for managing the radio resources allocated to the mobile stations, [characterised in that] the method comprising the steps of:

- maintaining a statistic [is maintained] of the values obtained for said quantity, and [in that]
- adapting the value of said associated parameter [is adapted] for the cell in such a way that, according to the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

2 (Amended). A method according to Claim 1, wherein said measurements on radio channels in the cell comprise measurements of [the] a reception level  $[(RXLEV)]$  of radio signals transmitted in at least one direction between the base station [(1)] and mobile stations [(3)].

3 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said measurements made on radio channels in the cell comprise quality measurements  $[(RXQUAL)]$  of the reception of radio signals transmitted in at least one direction between the base station [(1)] and mobile stations [(3)].

4 (Amended). A method according to [any one of the preceding claims] claim 1, wherein the obtaining of said quantity comprises estimating a channel-to-interferer ratio [(CIR)] at the base station [(1)] or at each mobile station [(3)].

5 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said measurements are made by the mobile stations [(3)].

6 (Amended). A method according to [Claims 4 and 5,] claim 4, wherein said measurements are made by the mobile stations, and wherein the estimation of a channel-to-interferer ratio [(CIR)] at a mobile station comprises a comparison between [the] a reception level [(RXLEV DL)], by the mobile station [(3)], of a signal transmitted by the base station [(1)] and [the] reception levels [(RXLEV NCELL(n))], by the same mobile station, of signals transmitted on beacon frequencies by the respective base stations of a set of adjacent cells.

7 (Amended). A method according to Claim 6, wherein said quantity [(CIR)] is [the] a ratio between the level of reception [(RXLEV DL)] of said signal transmitted by the base station [(1)] and a sum of the reception levels [(RXLEV NCELL(n)) of the signals transmitted on the beacon frequencies by the base stations of the adjacent cells.

9 (Amended). A method according to [any one of Claims 1 to 4] claim 1, wherein said measurements made on radio channels in the cell comprise measurements of a reception delay, by the base station [(1)], of signals transmitted by mobile stations [(3)].

10 (Amended). A method according to [any one of the preceding claims] claim 1, wherein the statistic of the values obtained of said quantity [(RXLEV, RXQUAL, DISTANCE, CIR)] is based on first measurements obtained on a dedicated signalling channel [(SDCCH)] for each mobile station [(3)] spontaneously accessing the cell.

11 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said quantity is compared with an associated parameter [(S<sub>PC</sub>)] in a control procedure of the power transmitted on radio channels allocated to communications between the base station [(1)] and mobile stations [(3)].

12 (Amended). A method according to Claim 11, wherein the power control procedure is such that only the mobile stations for which the value obtained of said quantity is greater than the selected value of a first associated parameter [(S<sub>PC</sub>)] can be subjected to power limitation, and wherein said determined fraction is of 10 to 20 % for the adaptation of the first parameter [(S<sub>PC</sub>)].

13 (Amended). A method according to Claim 12, wherein said quantity is further compared to a second associated parameter [(S<sub>HO</sub>)] in an inter-cell handover procedure, wherein the handover procedure is such that the mobile stations [(3)] for which the value obtained of said quantity is [greater] lower than the selected value of the second associated parameter are subjected to inter-cell handover, and wherein said determined fraction is lower for the adaptation of the second parameter [(S<sub>HO</sub>)] than for the adaptation of the first parameter [(S<sub>PC</sub>)].

14 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said quantity is compared to at least one associated parameter  $[(S_1 - S_3, S_{TS})]$  in a selection procedure for radio channels allocated to communications between the base station and the mobile stations.

15 (Amended). A method according to Claim 14, wherein the base station comprises a number  $M$  of transceiver units  $[(TRX1 - TRX4)]$ , one of which transmits on a beacon frequency, and wherein the radio channel selection procedure preferentially allocates channels on the beacon frequency to the mobile stations  $[(3)]$  for which the values obtained for said quantity are lower than an associated parameter  $[(S_1)]$ , the adaptation of which makes use of a determined fraction of the form  $100/M \%$ .

16 (Amended). A method according to Claim 14, wherein the base station comprises a number  $M$  of transceiver units  $[(TRX1 - TRX4)]$ , and wherein the radio channel selection procedure distributes the channels allocated to the mobile stations  $[(3)]$  based on comparisons between the values obtained of said quantity for said mobile stations and  $M-1$  associated parameters  $[(S_1 - S_3)]$ , the adaptation of which makes use of the respective determined fractions of the form  $100 \times m/M \%$  for  $1 \leq m \leq M-1$ .

17 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said quantity is compared to an associated parameter  $[(S_{HO})]$  in an inter-cell or intra-cell handover procedure.



18 (Amended). A method according to [any one of the preceding claims] claim 1, wherein the base station [(1)] comprises a plurality of transceiver units [(TRX1-TRX4)], and wherein the statistic for the values obtained for said quantity is maintained separately for each one of the transceiver units, in order to select independently the values of the associated parameter [(S<sub>TS</sub>)] for the different transceiver units, at least part of the radio resource management procedure being carried out for each one of the transceiver units.

19 (Amended). A control unit for at least one base station [(1)] of a cellular radio communications network, comprising means [(6)] for performing management procedures of radio resources allocated to communications between the base station and mobile stations [(3)] in a cell served by said base station, [characterised by] and means [(10,11)] for selecting [, in accordance with a selection method according to any one of the preceding claims, the] a value of at least one parameter [(S<sub>PC</sub>, S<sub>HO</sub>, S<sub>1</sub>, S<sub>2</sub>, S<sub>3</sub>, S<sub>TS</sub>)] used in at least one of said procedures in which values of a quantity [(RXLEV, RXQUAL, DISTANCE, CIR)] obtained from measurements made in the cell on radio channels between the base station and the mobile stations are compared with said parameter, wherein the selection means [(10,11) being] are arranged to maintain a statistic of the values obtained of said quantity, and to adapt the value of said parameter in such a way that, based on the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter. --

Please insert the following claims 20-36:

-- 20. A control unit according to Claim 19, wherein said measurements on radio channels in the cell comprise measurements of a reception level of radio signals transmitted in at least one direction between the base station and mobile stations.

21. A control unit according to claim 19, wherein said measurements made on radio channels in the cell comprise quality measurements of the reception of radio signals transmitted in at least one direction between the base station and mobile stations.

22. A control unit according to claim 19, wherein said quantity is obtained from an estimation of a channel-to-interferer ratio at the base station or at each mobile station.

23. A control unit according to claim 19, wherein said measurements are made by the mobile stations.

24. A control unit according to Claim 22, wherein said measurements are made by the mobile stations, and wherein the estimation of a channel-to-interferer ratio at a mobile station comprises a comparison between a reception level, by the mobile station, of a signal transmitted by the base station and reception levels, by the same mobile station, of signals transmitted on beacon frequencies by the respective base stations of a set of adjacent cells.

25. A control unit according to Claim 24, wherein said quantity is a ratio between the level of reception of said signal transmitted by the base station and a sum of the reception levels of the signals transmitted on the beacon frequencies by the base stations of the adjacent cells.

26. A control unit according to Claim 25, wherein said sum is weighted as a function of colours of the adjacent cells in frequency reuse patterns of the network.

27. A control unit according to claim 19, wherein said measurements made on radio channels in the cell comprise measurements of a reception delay, by the base station, of signals transmitted by mobile stations.

28. A control unit according to claim 19, wherein the statistic of the values obtained of said quantity is based on first measurements obtained on a dedicated signalling channel for each mobile station spontaneously accessing the cell.

29. A control unit according to claim 19, wherein said quantity is compared with an associated parameter in a control procedure of the power transmitted on radio channels allocated to communications between the base station and mobile stations.

30. A control unit according to Claim 29, wherein the power control procedure is such that only the mobile stations for which the value obtained of said quantity is greater than the selected value of a first associated parameter can be subjected to power limitation, and wherein said determined fraction is of 10 to 20 % for the adaptation of the first parameter.

31. A control unit according to Claim 30, wherein said quantity is further compared to a second associated parameter in an inter-cell handover procedure, wherein the handover procedure is such that the mobile stations for which the value obtained of said quantity is greater than the selected value of the second associated parameter are subjected to inter-cell handover, and wherein said determined fraction is lower for the adaptation of the second parameter than for the adaptation of the first parameter.

32. A control unit according to claim 19, wherein said quantity is compared to at least one associated parameter in a selection procedure for radio channels allocated to communications between the base station and the mobile stations.

33. A control unit according to Claim 32, wherein the base station comprises a number M of transceiver units, one of which transmits on a beacon frequency, and wherein the radio channel selection procedure preferentially allocates channels on the beacon frequency to the mobile stations for which the values obtained for said quantity are lower than an associated parameter, the adaptation of which makes use of a determined fraction of the form  $100/M \%$ .

34. A control unit according to Claim 32, wherein the base station comprises a number M of transceiver units, and wherein the radio channel selection procedure distributes the channels allocated to the mobile stations based on comparisons between the values obtained of said quantity for said mobile stations and M-1 associated parameters, the adaptation of which makes use of the respective

determined fractions of the form  $100 \times m/M \%$  for  $1 \leq m \leq M-1$ .

35. A control unit according to claim 19, wherein said quantity is compared to an associated parameter in an inter-cell or intra-cell handover procedure.

36. A control unit according to claim 19, wherein the base station comprises a plurality of transceiver units, and wherein the statistic for the values obtained for said quantity is maintained separately for each one of the transceiver units, in order to select independently the values of the associated parameter for the different transceiver units, at least part of the radio resource management procedure being carried out for each one of the transceiver units. --

## A B S T R A C T   O F   T H E   D I S C L O S U R E

For each base station serving mobile stations in a cell, measurements carried out on radio channels in the cell are used to obtain values of a quantity compared to one or several associated parameters in a procedure managing radio resources allocated to the mobile stations. A statistic of the obtained values the quantity is maintained. The value of each associated parameter for the cell is adapted such that, according to the statistic, a predetermined fraction of the values of the quantity obtained from the measurements are higher than the associated parameter value.

**REMARKS**

Entry of the above amendment is respectfully requested.

Respectfully submitted,

PIPER MARBURY RUDNICK & WOLFE

Date: December 21, 2000 By: Michael L. Kenaga  
Michael L. Kenaga  
Reg. No. 34,639

**PIPER MARBURY RUDNICK & WOLFE**

P.O. Box 64807

Chicago, IL 60664-0807

(312) 368-4000

103220-152230

METHOD AND APPARATUS FOR SELECTING PARAMETERS  
IN A CELLULAR RADIO COMMUNICATION NETWORK

The invention relates to the management of the radio resources used in cellular mobile radio communication networks.

Cellular networks comprise base stations to serve the mobile stations located in the different cells. Each base station has a limited range, and is allocated only one part of the radio resources made available to the network operator. These resources are reused in other cells to optimise the communication capacity offered by the network. This reuse results in a risk of interference between distinct communications sharing the same resources.

Various radio resource management procedures can be applied, depending on the operator's choice, in the infrastructure of the cellular network in order to optimise the use of the frequencies and to minimise interference. The following may be cited:

- power control procedures which limit the transmitted radio power when the propagation conditions between a base station and a mobile station are relatively good;
- resource allocation procedures within each cell, which may follow various "tiering" strategies for limiting interference or allowing for greater reuse of certain channels;
- automatic channel transfer procedures within the same cell (intra-cell handover), which change the channels allocated to communications undergoing interference;
- automatic transfer procedures between cells when communication is in progress (inter-cell handover), which provide the continuity of communication when a mobile terminal moves and changes cell;



- frequency-hopping procedures which provide frequency diversity of the interferers;
  - dynamic channel allocation procedures, by means of which the sets of frequencies employed in the cells
- 5 can be adapted to the interference conditions or the traffic conditions observed; etc.

A good number of these procedures call upon parameters which are compared to quantities measured by the base stations or the mobile stations in order to take

10 decisions or determine a command.

For example, in the case of power control, the attenuation applied is an increasing function of the power level sensed on the radio link, a comparison parameter serving to characterise this increase and/or to set a

15 power threshold below which no attenuation is imposed. In general, the inter-cell handover algorithms also use a power threshold below which they force a change of the attachment cell of the mobile station.

To optimise the whole arrangement, the network

20 operator must, cell by cell, set suitable values for those management parameters, which raises a number of difficulties:

- the number of applied procedures and cells, and hence the number of parameters to be set, can be
- 25 high, which often leads to adopting default values which are not well-suited to the local characteristics of the network;
- the choice of a parameter is not always intuitive, which also favours the adoption of default values;
- 30 - an empirical choice, even by a highly experienced installer, may turn out to be poorly suited due to the complexity of the radio propagation mechanisms;
- the relevance of the choice of a parameter is often highly sensitive to the choices made in the
- 35 adjacent cells, or for other parameters of the same procedure or of different procedures;
- when the radio environment is modified (addition, suppression, or breakdown of a base station or

simply of a transceiver unit, ongoing change in the propagation conditions in the vicinity of a base station, etc.), the choice of parameters should be revised in the cell concerned, or even in a number of adjacent cells. In practice, this is generally not done due to the complexity of the task.

An object of the present invention is to overcome at least some of the difficulties described heretofore. Another object is to simplify the choice of values for the radio resource management parameters used in the infrastructure of a cellular network. Another object is to render such a choice better adapted to the local characteristics of the cells.

The invention thus proposes a method of selecting the value of at least one radio resource management parameter employed by base station control units of a cellular radio communications network. For each base station serving mobile stations in a cell, values are obtained of at least one quantity based on measurements made on radio channels in the cell, this quantity being compared to at least one associated parameter in a procedure for managing the radio resources allocated to the mobile stations. According to the invention, a statistic is maintained of the values obtained for said quantity, and the value of said associated parameter is adapted for the cell in such a way that, according to the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

By means of the statistical distributions of the quantities deduced from the measurements, the method "learns" characteristics of the network, which may be pertinent in respect of one or more radio resource management procedures. Defining in relation to this distribution the values of parameters of these procedures, e.g. comparison thresholds, greatly simplifies the operator's parametering task.

Definition by means of a predetermined fraction of the values taken into account in the statistics will often

be more intuitive than the direct choice of an absolute value of the parameter.

For example, in the case of power control, it is known that it is desirable not to impose attenuation on 5 10% or 20% of the calls experiencing the worst reception conditions. The quantity forming the object of the statistic may therefore be the power level, or, more generally, a quantity correlated to the channel-to-interferer ratio, and for the power control a threshold 10 will be adopted which corresponds to 10% or 20% of the worst values of this quantity.

Adaptations of the same type may also be effected for parameters involved in the handover procedures, the procedures for selecting the radio channels allocated to 15 communications, etc.

The quantities subjected the statistic can be determined on the basis of measured power or quality levels, or of estimates of the channel-to-interferer ratio, downlink (from the base stations to the mobile 20 stations) and/or uplink. The quantity may likewise depend on the distance between the base station and the mobile station, evaluated on the basis of the propagation delay of certain signals.

To improve the uplink reception quality, the 25 manufacturers of cellular network infrastructures have conceived a certain number of methods based on diversity or signal processing techniques. These techniques cannot in general be used at the level of the mobile stations. The present invention allows for an improvement in both 30 directions of communication. Depending on the situation, the improvement may be greater in the uplink or in the downlink. Taking account of the methods already available for improving the uplink reception, it may be advantageous to give priority to the downlink in the implementation of 35 the present invention. To achieve this, the measurements used to obtain the quantity subjected to the statistic, on the basis of which the value of the parameter is determined, will preferably be the measurements made by

the mobile stations.

For certain procedures, particularly for inter-cell handover procedures, it is judicious for the statistic of the values obtained for the quantity deduced from the measurements to relate to the first measurements obtained on a dedicated signalling channel for each mobile station spontaneously accessing the cell. This allows the statistic to provide a faithful reflection of the radio coverage of the cell, while avoiding to take account of the measurements relating to the mobile stations of which the access to the cell, or the persistence in the cell, would not be spontaneous but would result from an artificial handover or other procedure.

Another aspect of the present invention relates to a control unit for at least one base station of a cellular radio communications network, comprising means for performing management procedures of radio resources allocated to communications between the base station and mobile stations in a cell served by said base station, and means for selecting, in accordance with a selection method as defined hereabove, the value of at least one parameter used in at least one of these procedures.

Other features and advantages of the present invention will be disclosed in the description hereinafter of non-limitative embodiments, in reference to the appended drawings, in which:

- Figure 1 is a schematic representation of the access system to a cellular radio network;
- Figure 2 is a graph showing an example of the distribution function of a measured power level, and illustrating its exploitation in power control and handover procedures;
- Figure 3 is a schematic representation of a cell in which a particular procedure for choice of allocated radio channels has been applied;
- Figure 4 is a graph similar to that of Figure 2, illustrating the determination of the thresholds used in the procedure applied in the cell of Figure

3;

- Figure 5 is a diagram illustrating another procedure for the choice of channel allocation; and
- Figures 6 and 7 are graphs showing the improvement in reception in the uplink and downlink, obtained by applying the invention to a procedure of choice of allocated radio channels.

The infrastructure of a cellular network such as that represented in Figure 1 comprises base stations (BTS) 1, 2, distributed over the geographical cover area of the network. The base stations procure radio links with the mobile stations (MS) 3, which are located within their range. They are also linked to an access system comprising base station controllers (BSC) 4 and mobile service switching centres (MSC) 5, which provide the interface with the fixed networks. Each BTS 1 depends on a BSC 4, but each BSC may supervise several BTS. For each BTS 1 which it supervises, the BSC 4 comprises a control software module 6, which carries out a certain number of radio resource management procedures for the cell served by this BTS.

The method according to the invention is described hereinafter in relation to the base station 1. It is understood that this may also be applied in a similar manner for each of the other base stations 2. In schematic manner, the contour 7 drawn in Figure 1 designates the limit of the cell served by the BTS 1. Beyond this limit, it is an adjacent BTS 2 which serves the mobile stations.

The mobile stations 3 active within the cell periodically carry out measurements on the radio signals emitted by the BTS 1 on the downlink channels. These measurements are effected on a beacon frequency assigned to the cell when the mobile is not in communication, or on the traffic or signalling channels. In addition, when a mobile station communicates with the BTS, the latter effects measurements on the signals which it receives.

In the specific case of GSM networks, which will be considered hereinafter by way of example, the measurements

effected are described in Recommendation GSM 05.08 published by the ETSI (European Telecommunications Standards Institute), to which reference may be made. These measurements include:

- 5       - the downlink power level sensed by the mobile 3, averaged by periods of 480 ms and coded on 6 bits by a quantity RXLEV\_DL. The values of RXLEV\_DL are increased by one unit per decibel of the measured power P (RXLEV\_DL = 0 if  $P < -103$  dBm, RXLEV\_DL = 1 if  $-103 \leq P < -102$  dBm, ..., RXLEV\_DL = 63 if  $P \geq -41$  dBm);
- 10       - the downlink quality level, coded on 3 bits by a quantity RXQUAL\_DL calculated on the basis of estimates of the bit error rate (BER) observed on the downlink by means of the channel equaliser or of the convolutional decoder of the mobile 3 (RXQUAL\_DL = 0 if  $BER < 0.2\%$ , RXQUAL\_DL = 1 if  $0.2\% < BER < 0.4\%$ , RXQUAL\_DL = 2 if  $0.4\% < BER < 0.8\%$ , RXQUAL\_DL = 3 if  $0.8\% < BER < 1.6\%$ , RXQUAL\_DL = 4 if  $1.6\% < BER < 3.2\%$ , RXQUAL\_DL = 5 if  $3.2\% < BER < 6.4\%$ , RXQUAL\_DL = 6 if  $6.4\% < BER < 12.8\%$ , RXQUAL\_DL = 7 if  $BER > 12.8\%$ );
- 15       - the uplink power and quality levels measured by the BTS 1, and coded by two quantities RXLEV\_UL and RXQUAL\_UL defined in the same manner as for the corresponding downlink quantities RXLEV\_DL and RXQUAL\_DL;
- 20       - power levels which the mobile stations 3 sense from other BTS 2 on the beacon frequencies assigned to the adjacent cells. Each of these levels is coded on six bits by a quantity RXLEV\_NCELL(n) in the same manner as for the quantity RXLEV\_DL;
- 25       - a distance (in the meaning of radio propagation) between the BTS and the mobile station, which the BTS 1 evaluates on the basis of the reception delay of the radio signal sent by the mobile 3 with respect to the signal transmission by the BTS.
- 30
- 35

The measurements made by the mobile station 3 are transmitted on the radio interface in a message called MEASUREMENT\_REPORT. The BTS 1 retransmits these measurements to the BSC 4 in a message called  
5 MEASUREMENT\_RESULT, appending the measurements which it has made itself. The whole of these measurements is exploited by the BSC 4 in the context of the radio resource management procedures used in the cell.

According to the invention, at least part of these  
10 measurements are also supplied to a statistical calculation module 10, which analyses the occurrence frequencies of the different possible values of one or several quantities which depend on it.

In the exemplary architecture shown in Figure 1, the  
15 statistical calculation module 10 is located in the BSC 4, and intercepts the MEASUREMENT\_RESULT messages transmitted on the interface (A-bis) between BTS 1 and BSC 4. The BSC comprises another module 11, which carries out the adaptation of the different parameters used by the module  
20 6 supervising the BTS 1, with the aid of the statistics maintained by the module 10. Alternatively, the modules 10 and/or 11 could be located in the base stations.

The GSM systems combine frequency division multiple access (FDMA) and time division multiple access (TDMA).  
25 One of the timeslots in each frame on the beacon frequency of each base station is used to provide a control channel (BCCH). The other timeslots can be allocated as traffic channels. The BTS is generally provided with other frequencies to provide traffic channels. To access the  
30 network, a mobile which is active in the cell issues an access request on a random access channel (RACH) associated with the BCCH, after which the base station allocates to it a dedicated bidirectional signalling channel (SDCCH) on which various signalling elements are  
35 exchanged.

The measurements referred to heretofore are made by the base station 1 and the mobile stations 3 as soon as a dedicated signalling channel is allocated. Advantageously,

00720544.022301

the measurements, on the basis of which the module 10 makes the statistical calculations, are limited to the first measurements obtained on the SDCCH channel for each mobile station spontaneously accessing the cell. This  
5 procures a limited number of measurement samples, but these provide a good representation of the effective radio coverage within the cell. Indeed, it avoids the statistics being influenced by the effects of the handover algorithms applied in the cell or in adjacent cells.

10 The module 10 calculates the distribution function of one or more quantities obtained on the basis of the measurement results. The curve in Figures 2 and 4 shows an example of the distribution function thus calculated, in the case where the quantity in question is the quantity  
15 RXLEV representing a sensed power level (RXLEV\_UL, RXLEV\_DL, or a combination of the two). The value  $f(\text{RXLEV})$  of the distribution function, for a certain value RXLEV, represents the probability of observation of a value at most equal to RXLEV among the values deduced from the  
20 measurements actually made. The curve obtained by derivation represents the probability density of the quantity.

In order to obtain a distribution function such as that represented in Figures 2 and 4, a simple count is  
25 made of the values derived from the measurements.

The module 10 has, for example, a counter  $N(x)$  for each possible value  $x$  of the quantity being analyzed. If a measurement sample gives a value  $y$ , it increments by one  
unit the counters  $N(x)$  with  $x \geq y$ . The distribution  
30 function is given by  $f(x) = N(x)/N(x_{\max})$ , where  $x_{\max}$  is the highest possible value of  $x$ . When  $N(x_{\max})$  attains a certain overflow value, the module 10 divides all the counters  $N(x)$  by a renormalisation factor. The overflow value and the renormalisation factor are chosen as a function of the  
35 period which it is intended should be taken into account in the statistic.

The module 10 could also calculate the probability



density with occurrence counters for each value, and to deduce from this the distribution function.

Curves of the type represented in Figures 2 and 4 are used by the module 11 to adaptatively determine the thresholds used in certain radio resource management procedures.

For example, the control module 6 of the BSC can apply, for communications involving its BTS 1, a power control algorithm using the following recursive formula to determine the attenuation which should be applied in successive time windows:

$$TXPWR_n = \max\{0, k \times (RXLEVAV_{n-1} + TXPWR_{n-1} - S_{PC})\} \quad (1)$$

where:

$TXPWR_n$  is the attenuation factor, expressed in dB with respect to the maximum power, used in the uplink and/or in the downlink in the n-th time window;

k is a compensation factor between 0 (no power control) and 1;

$RXLEVAV_{n-1}$  is the value of a power level RXLEV averaged on the (n-1)-th time window, expressed in dBm or in RXLEV units;

$S_{PC}$  is a threshold expressed in the same units as the quantity  $RXLEVAV_{n-1}$ .

In the expression (1),  $RXLEV_0 = RXLEVAV_{n-1} + TXPWR_{n-1}$  represents the field strength which would have been received in the absence of power control. At each iteration of the algorithm, i.e. after each averaging window, the attenuation is recalculated. Under stable conditions, the attenuation factor is equal to  $k \times (RXLEV_0 - S_{PC})$  if  $RXLEV_0 \geq S_{PC}$ , and equal to 0 dB if  $RXLEV_0 \leq S_{PC}$ . This calculation can be carried out separately for the uplink (averaging  $RXLEV_{UL}$ ) and for the downlink (averaging  $RXLEV_{DL}$ ).

It is known empirically that this power control algorithm is optimum when only about 20% of the

communications are at maximum power, i.e. when the 80% of the best communications are the object of a power limitation forced by the algorithm ( $TXPWR > 0$  dB). In general, the maximum power is required for communications with the mobiles furthest away from the base station, for which the received field is the weakest (the mobiles located between the contours 7 and 8 in the schematic representation of Figure 1). These are approximately the 20% worst cases in the statistic for radio-electric coverage of the cell.

The threshold  $S_{PC}$  from the expression (1) can therefore be defined on the basis of the distribution function  $f(RXLEV)$ , as indicated in Figure 2. This is the value for which the distribution function is valued at 0.2 ( $S_{PC} = 28$  in the example of Figure 2, hence a power of -75 dBm). In practice, the threshold  $S_{PC}$  may in general be chosen in the range  $10\% \leq f(S_{PC}) \leq 20\%$ .

The handover algorithms executed by the BSC use a number of thresholds which may be adapted in a similar manner.

For example, too low a field strength is generally a cause of handover. If the parameter  $RXLEV\_DL$  or  $RXLEV\_UL$  measured in the course of communication falls below a threshold  $S_{HO}$ , the BTS issues a command to the mobile station to change cell, generally for connection to the adjacent cell for which the sensed power level  $RXLEV\_NCELL(n)$  is the highest.

It is judicious for the threshold  $S_{HO}$  to be smaller than the threshold  $S_{PC}$ , in order to avoid the forcing of handovers due to insufficient power in the case of mobiles which would not be at maximum power. In the example of Figure 2, the threshold  $S_{HO}$  is chosen by the module 11 as corresponding to the value of  $RXLEV$  such that  $f(RXLEV) = 10\%$  ( $S_{HO} = 19$ , hence a power of -84 dBm).

The choices of the parameters  $S_{PC}, S_{HO}, \dots$  are modified automatically by the modules 10 and 11 when certain

modifications occur in the radio environment, including the situation of a new neighbouring base station being added. The adaptation produces new values after convergence of the statistic.

- 5       The statistics effected by the module 10 can likewise be used in the context of procedures for selecting the channels which are to be allocated to communications being established.

- 10       By way of example, certain operators adopt strategies of the "concentric cell" type, according to which the FDMA frequencies are allocated to communications in a manner which depends on the signal strength.

- 15       Figure 3 provides an illustration of this in a specific case. In this schematic example, BTS 1 comprises M=4 transceiver units TRX1-TRX4, associated respectively with different carrier frequencies. The unit TRX1 is associated with the beacon frequency and functions at maximum power without frequency hopping to ensure the required coverage. The other units TRX2-TRX4 are used for traffic channels, and they are allocated frequency numbers (ARFCN in the GSM terminology) if there is no frequency hopping, or identification numbers of a hopping sequence (MAIO).
- 20

- 25       The purpose of the unit TRX4 is to transmit at the weakest power, i.e. preferably for mobiles which are located in the area delimited schematically by the circle C4 in Figure 3. The unit TRX3 preferably transmits at slightly higher power, a priori for mobiles which are located in the area delimited schematically by the circles C4 and C3. The unit TRX2 preferably transmits at a still higher power, a priori for mobile stations located in the area delimited schematically by the circles C3 and C2. The unit TRX1, functioning on the beacon frequency at maximum power, serves a priori for the "worst" mobiles
- 30
- 35       (between the circles C2 and C1). In practice, it is clear that the preferential service areas for the TRXm units are not circular.

This type of allocation strategy allows for the reuse

of frequencies to be optimised, adopting a reuse pattern which is the smaller for a given frequency, the weaker the transmission power is on this frequency.

In order to decide to allocate a given communication  
5 frequency to a mobile station, or a given transceiver unit TRX<sub>m</sub>, one possibility is to compare the power level RXLEV detected by the mobile from the base station (or by the base station from the mobile, or a combination of the two) with decision thresholds  $S_1, S_2, S_3$  defined by the module 11  
10 on the basis of the distribution function determined by the calculation module 10.

Figure 4 illustrates this determination of the thresholds  $S_1, S_2, S_3$ , which correspond respectively to the values 25%, 50%, and 75% of the distribution function  
15 ( $S_1 = 31$ ,  $S_2 = 42$ , and  $S_3 = 50$  in the example represented, that is respectively -72 dBm, -61 dBm, and -53 dBm). For each mobile to which a channel is to be allocated, if  $RXLEV < S_1$  (25% worst cases), the beacon frequency (unit TRX1) will be retained, because the power will be maximum  
20 if an available timeslot remains on this frequency. If all the timeslot are occupied by the unit TRX1, the algorithm will search to determine whether a timeslot is available on the unit TRX2, then on the unit TRX3, and so on. If  $S_1 \leq RXLEV < S_2$ , the frequency of the unit TRX2 will  
25 be allocated for preference. If  $S_2 \leq RXLEV < S_3$ , the frequency of the unit TRX3 will be allocated for preference. And if  $RXLEV \geq S_3$  (25% best cases), the frequency of the unit TRX4 will be allocated for preference.

30 In the general case of a BTS with M transceiver units, each threshold  $S_m$  ( $1 \leq m \leq M-1$ ) is defined on the basis of a fraction of the form  $100 \times m/M$  % in the foregoing procedure, i.e.  $f(S_m) = 100 \times m/M$  %.

In the case of failure of a TRX<sub>m</sub> unit, the relevant

thresholds  $S_m$  are easily modified. It is sufficient to reduce the number  $M$  by one unit for the module 11, after convergence of the statistics, to select new adequate values.

5 This communication channel selection strategy can have numerous variants.

In one of these, two reuse patterns only are used; one for the beacon frequencies and the other, smaller in size, for the other frequencies. In other words, only the  
10 threshold  $S_1$  (with  $f(S_1) = 100/M \%$ ) is used to decide whether a mobile will communicate on the beacon frequency (unit TRX1) or on another frequency in each cell (unit TRXm, with  $2 \leq m \leq M$ ).

As with the previous technique, this procedure for  
15 selecting the frequencies to be allocated has the advantage of preferentially confining the transmissions with the highest energy to the frequencies which are the least reused.

Such a procedure can clearly be applied irrespective  
20 of the TRXm units, taking account simply of the frequency to be allocated.

Furthermore, the strategy of allocated channel selection can also be applied to the TDMA timeslots, and not only to the FDMA frequencies.

25 Figure 5 provides an illustration of this. The lower part shows the division into eight timeslots TS0-TS7 of the TDMA frame on a given carrier frequency, and the upper part diagrammatically shows the desired profile of the transmitted power PW over these timeslots.

30 In this example, the allocation procedure of the timeslot TS<sub>i</sub> attempts to allocate the timeslots of even rank  $i$  to the communications of relatively high energy (mobile distant from the base station) and the timeslots of odd rank  $i$  to the communications of lower energy (close mobile). This type of allocation strategy, implemented in  
35 an cluster of adjacent cells, allows for the average co-channel interference level to be reduced. If the base

stations are synchronised, it is possible to permute the role of the even-numbered and odd-numbered timeslots for an adjacent cell reusing the same frequency, whereby interference between the most energetic communications in the two cells can be avoided. In the case of asynchronous networks, the procedure reduces the average level of co-channel interference by limiting the average duration of transmission at high power.

In order to implement such a timeslot allocation procedure, the power level sensed by a mobile from the BTS or by the BTS from the mobile (or a combination of the two) is compared to a threshold  $S_{TS}$ , allowing a preferential allocation over an odd or even timeslot (as available). This threshold  $S_{TS}$  is advantageously defined with the aid of the distribution function of the associated measured quantity ( $f(S_{TS}) = 50\%$  in the example under consideration).

It is noted that the statistics kept by the calculation module for each cell can be global with regard to the cell, or differentiated according to different sub-units or different sub-assemblies of resources used in the cell.

For example, in the case of the BTS 1 represented in Figure 3, the module may retain, on the one hand, a global statistic for the cell being served, and, on the other M similar statistics established respectively on the basis of the measurements made in relation to the mobiles assigned to the different transceiver units TRX1-TRX4. The global statistic serves to define the frequency choice thresholds  $S_1-S_3$  as disclosed with reference to Figure 4, such that the M statistics relating to the transceiver units can be used to select the threshold  $S_{TS}$  called upon by the timeslot allocation procedure described with reference to Figure 5.

In the foregoing examples, the quantity which is subjected to the statistic maintained by the module 10 is deduced from the field strength measurements RXLEV, made

by the mobile stations or the base stations. It is possible to deduce these quantities from the other measurements reported in the message MEASUREMENT\_RESULT (RXQUAL, DISTANCE, etc.). The quantity in question can also be a combination of one or more of these different measurements made in one or more directions of communication. Its precise choice depends on what was judged adequate for the optimisation of the procedure, whose parameters are adapted according to the invention.

In addition, the same radio resource management procedure can call upon statistics of different quantities maintained by the module 10. For example, certain intra-cell handover algorithms provide that, if a communication experiences a relatively high RXLEV and simultaneously a relatively low RXQUAL (good propagation but with the probable presence of an interferer on the same channel), the channel allocated to this communication can be modified. It is possible to envisage the corresponding thresholds on RXLEV and on RXQUAL to be defined with the aid of the distribution functions of these quantities calculated by the module 10.

An interesting quantity to be used in a number of radio resource management procedures is the channel-to-interferer ratio. If this ratio is available, it is possible advantageously to maintain a statistic thereof and to make use of it instead of the RXLEV quantities in each of the procedures described heretofore.

The channel-to-interferer ratio is not directly measurable, or only with great difficulty. In the uplink, the base station can evaluate it by various known techniques of analysis of the received radio signal. In the downlink, an evaluation scheme based on a comparison between the reception level by the mobile station of a signal transmitted by the base station and the reception levels by the same mobile station of signals transmitted on the beacon frequencies by the base stations of a group of adjacent cells, has been proposed in French Patent Application 97 11467.

In this scheme, the downlink channel-to-interferer ratio CIR is evaluated by the ratio between the downlink sensed power level, represented by RXLEV\_DL, and the sum of the power levels measured from the adjacent cells, represented by RXLEV\_NCELL(n). The measurement RXLEV\_DL must be corrected, if appropriate, in order to take account of the power control. In the present case, since the statistics relate to the first measurements acquired on the SDCCH channel for which no power control is applied, this correction is not useful.

The evaluation of the channel-to-interferer ratio CIR can be effected by the module 10 on the basis of the measurements received in the message MEASUREMENT\_RESULT, which contains at most six RXLEV\_NCELL(n) measurements relating to the six beacon frequencies received with the highest energy by the mobile from adjacent cells, among a list of frequencies to be monitored which the BTS 1 signals to the mobiles on the BCCH channel:

$$CIR = \frac{P_{DL}}{\sum_{n=1}^6 g(n) \times P_{NCELL}(n)} \quad (2)$$

where the powers are given by  $P_{DL} = 10^{RXLEV\_DL/10}$  and  $P_{NCELL}(n) = 10^{RXLEV\_NCELL(n)/10}$ , and  $g(n)$  is a weighting coefficient dependant on the colours of the adjacent cells in the reuse pattern of the traffic channels. If the adjacent cell  $n$  is of the same colour as the serving cell of the mobile, then  $g(n) = 1$ . Otherwise, the coefficient  $g(n)$  takes account of the protection of the adjacent channels, which is at least 18 dB in GSM, i.e.  $g(n) = 0.016$ .

This CIR estimate is characteristic of the radio-electric position of the mobile and represents the real behaviour of the network when loaded. The CIR estimate is the more reliable, the smaller the reuse pattern becomes, and the greater the load. In order to take account of this, it is possible to provide that the module 10 only evaluates the statistic of the CIR quantity in the



circumstances in which the network is locally loaded, e.g. at peak time.

The graphs in Figures 6 and 7 show the results of simulations carried out to assess the gain obtained by the method according to the invention. In the example simulated, the cellular network of the GSM type uses base stations with omni-directional antennae without power control, with a traffic load of 70%, and a reuse pattern of 3 cells for the traffic channels and 12 cells for the BCCH channels (four carriers per cell). The reference curves A correspond to the case where the carriers are randomly allocated, the invention not being applied. For the other curves B,C,D, the allocation of the frequency channels was such that 25% of the communications for which the conditions were worst were effected for preference on the BCCH frequency (reused in a pattern of 12), the others being randomly allocated a channel on another carrier (reused in a pattern of 3). The curves show the dependency between the ratio  $E_b/N_0$  (energy per bit over noise power) and the binary error rate BER, in the uplink for Figure 6 and in the downlink for Figure 7.

The curves B correspond to the case where the quantity used to decide on the frequency to be allocated, and of which the statistic serves to define the corresponding threshold  $S_1$ , is the power level  $RXLEV\_UL$ . For the curves C, this quantity is the signal-to-interferer ratio CIR, evaluated on the downlink according to formula (2). For the curves D, it is the distance evaluated by the BTS on the basis of the uplink reception delay with respect to the downlink signal. The substantial gains may be noted which are achieved by the implementation of the invention. These gains are not identical in both communication directions, and depend on the quantities used, which allows for different optimisation strategies to be used depending on the particular features of the network.

**CLAIMS**

1. A method of selecting the value of at least one radio resource management parameter ( $S_{PC}, S_{HO}, S_1, S_2, S_3, S_{TS}$ ) employed by base station control units (4) of a cellular  
5 radio communications network, wherein, for each base station (1) serving mobile stations (3) in a cell, values are obtained of at least one quantity (RXLEV, RXQUAL, DISTANCE, CIR) based on measurements made on radio channels in the cell, said quantity being compared to at  
10 least one associated parameter in a procedure for managing the radio resources allocated to the mobile stations, characterised in that a statistic is maintained of the values obtained for said quantity, and in that the value of said associated parameter is adapted for the cell in  
15 such a way that, according to the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

2. A method according to Claim 1, wherein said measurements on radio channels in the cell comprise  
20 measurements of the reception level (RXLEV) of radio signals transmitted in at least one direction between the base station (1) and mobile stations (3).

3. A method according to any one of the preceding claims, wherein said measurements made on radio channels  
25 in the cell comprise quality measurements (RXQUAL) of the reception of radio signals transmitted in at least one direction between the base station (1) and mobile stations (3).

4. A method according to any one of the preceding  
30 claims, wherein the obtaining of said quantity comprises estimating a channel-to-interferer ratio (CIR) at the base station (1) or at each mobile station (3).

5. A method according to any one of the preceding claims, wherein said measurements are made by the mobile

stations (3).

6. A method according to Claims 4 and 5, wherein the estimation of a channel-to-interferer ratio (CIR) at a mobile station comprises a comparison between the reception level (RXLEV DL), by the mobile station (3), of a signal transmitted by the base station (1) and the reception levels (RXLEV NCELL(n)), by the same mobile station, of signals transmitted on beacon frequencies by the base stations of a set of adjacent cells.

7. A method according to Claim 6, wherein said quantity (CIR) is the ratio between the level of reception (RXLEV DL) of said signal transmitted by the base station (1) and a sum of the reception levels (RXLEV NCELL(n)) of the signals transmitted on the beacon frequencies by the base stations of the adjacent cells.

8. A method according to Claim 7, wherein said sum is weighted as a function of colours of the adjacent cells in frequency reuse patterns of the network.

9. A method according to any one of Claims 1 to 4, wherein said measurements made on radio channels in the cell comprise measurements of a reception delay, by the base station (1), of signals transmitted by mobile stations (3).

10. A method according to any one of the preceding claims, wherein the statistic of the values obtained of said quantity (RXLEV, RXQUAL, DISTANCE, CIR) is based on first measurements obtained on a dedicated signalling channel (SDCCH) for each mobile station (3) spontaneously accessing the cell.

11. A method according to any one of the preceding claims, wherein said quantity is compared with an associated parameter ( $S_{PC}$ ) in a control procedure of the power transmitted on radio channels allocated to

communications between the base station (1) and mobile stations (3).

12. A method according to Claim 11, wherein the power control procedure is such that only the mobile stations  
5 for which the value obtained of said quantity is greater than the selected value of a first associated parameter ( $S_{PC}$ ) can be subjected to power limitation, and wherein said determined fraction is of 10 to 20 % for the adaptation of the first parameter ( $S_{PC}$ ).

10 13. A method according to Claim 12, wherein said quantity is further compared to a second associated parameter ( $S_{HO}$ ) in an inter-cell handover procedure, wherein the handover procedure is such that the mobile stations (3) for which the value obtained of said quantity  
15 is greater than the selected value of the second associated parameter are subjected to inter-cell handover, and wherein said determined fraction is lower for the adaptation of the second parameter ( $S_{HO}$ ) than for the adaptation of the first parameter ( $S_{PC}$ ).

20 14. A method according to any one of the preceding claims, wherein said quantity is compared to at least one associated parameter ( $S_1$ - $S_3$ ,  $S_{TS}$ ) in a selection procedure for radio channels allocated to communications between the base station and the mobile stations.

25 15. A method according to Claim 14, wherein the base station comprises a number M of transceiver units (TRX1-TRX4), one of which transmits on a beacon frequency, and wherein the radio channel selection procedure preferentially allocates channels on the beacon frequency  
30 to the mobile stations (3) for which the values obtained for said quantity are lower than an associated parameter ( $S_1$ ), the adaptation of which makes use of a determined fraction of the form  $100/M$  %.

16. A method according to Claim 14, wherein the base station comprises a number M of transceiver units (TRX1-TRX4), and wherein the radio channel selection procedure distributes the channels allocated to the mobile stations  
5 (3) based on comparisons between the values obtained of said quantity for said mobile stations and M-1 associated parameters ( $S_1$ - $S_3$ ), the adaptation of which makes use of the respective determined fractions of the form  $100 \times m/M \%$  for  $1 \leq m \leq M-1$ .

10 17. A method according to any one of the preceding claims, wherein said quantity is compared to an associated parameter ( $S_{HO}$ ) in an inter-cell or intra-cell handover procedure.

18. A method according to any one of the preceding  
15 claims, wherein the base station (1) comprises a plurality of transceiver units (TRX1-TRX4), and wherein the statistic for the values obtained for said quantity is maintained separately for each one of the transceiver units, in order to select independently the values of the  
20 associated parameter ( $S_{TS}$ ) for the different transceiver units, at least part of the radio resource management procedure being carried out for each one of the transceiver units.

19. A control unit for at least one base station (1)  
25 of a cellular radio communications network, comprising means (6) for performing management procedures of radio resources allocated to communications between the base station and mobile stations (3) in a cell served by said base station, characterised by means (10,11) for  
30 selecting, in accordance with a selection method according to any one of the preceding claims, the value of at least one parameter ( $S_{PC}, S_{HO}, S_1, S_2, S_3, S_{TS}$ ) used in at least one of said procedures in which values of a quantity (RXLEV, RXQUAL, DISTANCE, CIR) obtained from measurements made in


the cell on radio channels between the base station and the mobile stations are compared with said parameter, the selection means (10,11) being arranged to maintain a statistic of the values obtained of said quantity, and to  
5 adapt the value of said parameter in such a way that, based on the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
220

# ABSTRACT

For each base station (1) serving mobile stations in a cell, measurements carried out on radio channels in the cell are used to obtain values of a quantity compared to one or several associated parameters in a procedure managing radio resources allocated to the mobile stations. A statistic of the obtained values the quantity is maintained. The value of each associated parameter for the cell is adapted such that, according to the statistic, a predetermined fraction of the values of the quantity obtained from the measurements are higher than the associated parameter value.

FIG.1.

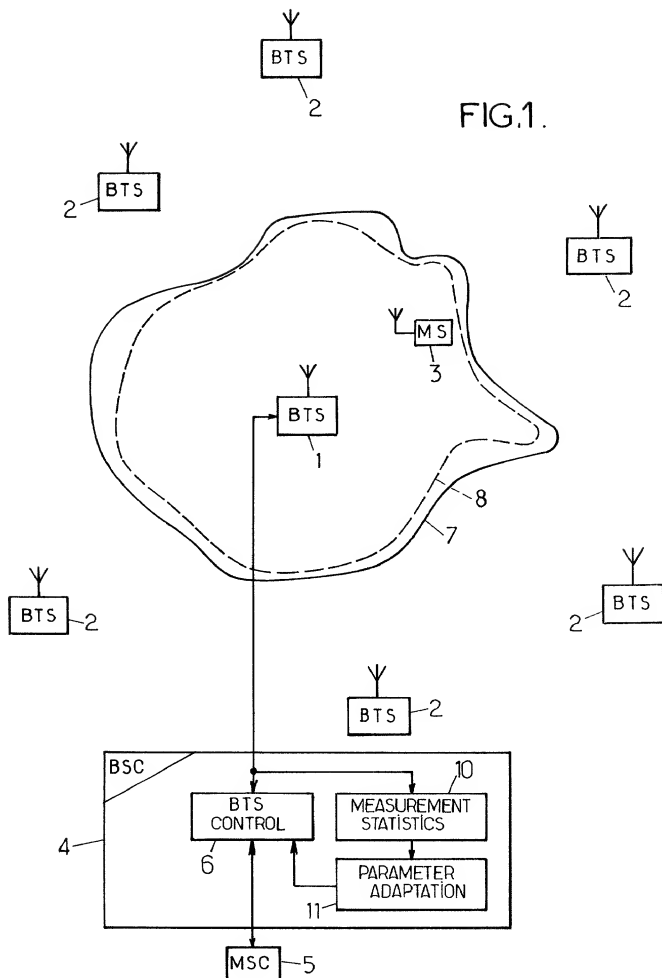



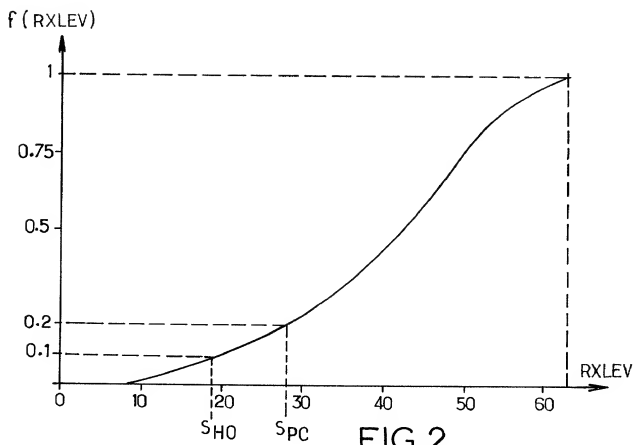


FIG.2.

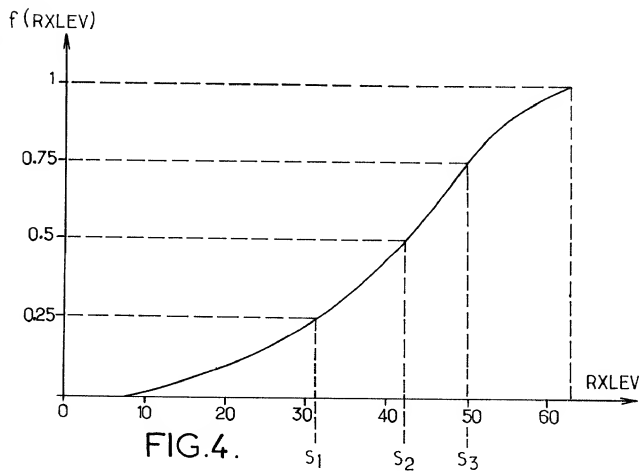


FIG.4.

FIG.3.

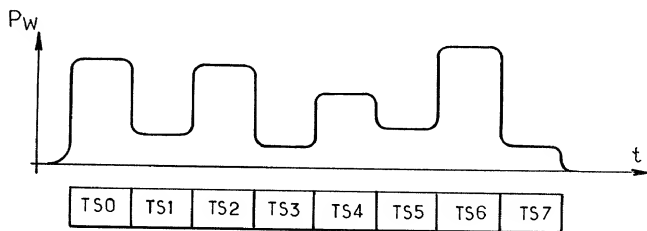
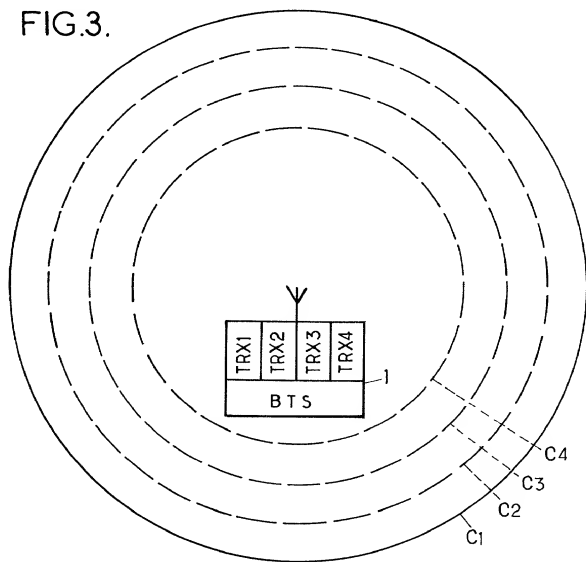


FIG.5.

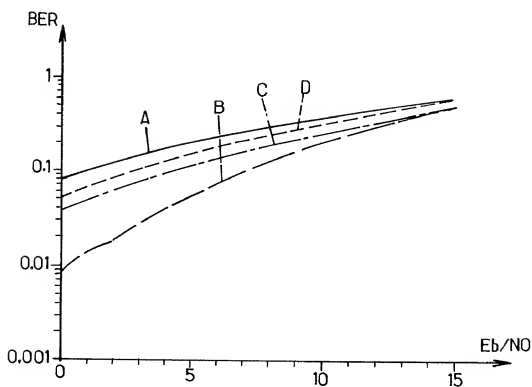


FIG. 6.

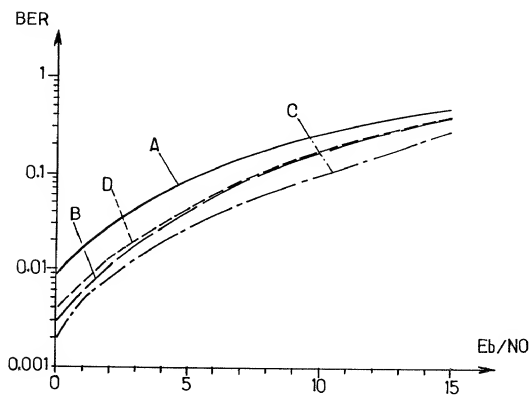


FIG. 7.

Docket No.

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR SELECTING PARAMETERS IN A CELLULAR RADIO COMMUNICATION NETWORK

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

98 08150	FRANCE	26.06.98	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

PCTFR99/01505

23.06.99

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Michael L. Kenaga	<u>34,639</u>
William T. Rifkin	<u>26,501</u>
Mark I. Feldman	<u>26,380</u>
James P. Ryther	<u>20,424</u>
Mary Spalding Burns	<u>32,116</u>
R. Blake Johnston	<u>41,097</u>
Thomas W. Ryan	<u>43,072</u>
Tracey R. Thomas	<u>38,633</u>
David J. Richter	<u>26,221</u>

Send Correspondence to: Michael L. Kenaga  
RUDNICK & WOLFE  
P.O. Box 64807  
Chicago, Illinois 60664-0807

Direct Telephone Calls to: (name and telephone number)  
Michael L. Kenaga, (312) 368-8937

Full name of sole or first inventor	
<u>Thierry BILLON</u>	
Sole or first inventor's signature	Date
	<u>January 14<sup>th</sup> 2000</u>
Residence	
<u>9, rue des pavillons - 92800 PUTEAUX - FRANCE</u>	
Citizenship	
<u>French</u> <u>FRX</u>	
Post Office Address	
<u>Same as above</u>	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	